


INTERLOCKING JOINT PIPES TO SABS SPECIFICATION SANS 677 FOR STORMWATER APPLICATIONS



ELEVATION

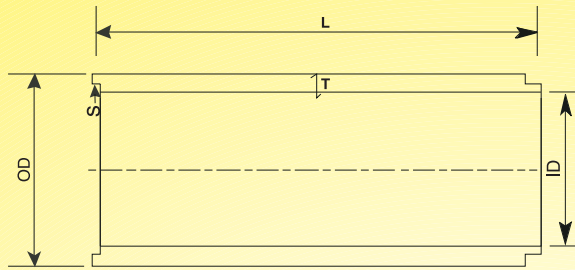

Nominal Diameter mm	Inside Diameter ID mm	Outside Diameter OD mm	Wall Thickness T mm	Female Socket S mm	Nominal Length L metre	Approximate Mass per Metre kg
CLASS 50D						
300	292	362	35	17	2.5	0.102
375	369	445	38	17	2.5	0.139
450	445	533	44	17	2.5	0.182
525	514	616	51	19	2.5	0.244
600	611	699	44	19	2.5	0.262
675	685	787	51	20	2.5	0.327
750	762	870	54	20	2.5	0.354
825	830	946	58	22	2.5	0.421
900	913	1041	64	25	2.5	0.509
1050	1060	1180	60	25	2.5	0.569
1200	1190	1340	75	28	2.5	0.798
CLASS 75D						
300	292	362	35	17	2.5	0.102
375	369	445	38	17	2.5	0.139
450	445	533	44	17	2.5	0.182
525	514	616	51	19	2.5	0.244
600	611	699	44	19	2.5	0.262
675	685	787	51	20	2.5	0.327
750	742	870	64	20	2.5	0.408
825	810	946	68	22	2.5	0.488
900	893	1041	74	25	2.5	0.568
1050	1040	1180	70	25	2.5	0.632
1200	1170	1340	85	28	2.5	0.864
CLASS 100D						
300	292	362	35	17	2.5	0.102
375	369	445	38	17	2.5	0.139
450	445	533	44	17	2.5	0.182
525	514	616	51	19	2.5	0.244
600	587	699	56	19	2.5	0.302
675	647	787	79	20	2.5	0.423
750	718	870	76	20	2.5	0.486
825	788	946	70	22	2.5	0.551
900	869	1041	86	25	2.5	0.650
1050	1000	1180	90	25	2.5	0.807
1200	1150	1340	95	28	2.5	0.960

Please note: Mass per metre is an approximation only.

Vula cannot guarantee the exact mass as listed on this table.