


REINFORCED MANHOLE RINGS TO SABS SPECIFICATION SANS 1294

Chamber Sections				
Nominal Diameter	Outside Diameter	Inside Diameter	Wall Thickness	Mass Kg
750 mm	860mm	750mm	55mm	189/500mm
1000 mm	1130mm	1000mm	65mm	590/m
1250 mm	1400mm	1250mm	75mm	876/m
1500 mm	1670mm	1500mm	85mm	1100/m
Effective Lengths				
750 DIA - 250, 500mm • 1000, 1250 & 1500 DIA - 250, 500, 1000mm				
Reducer Slab	Outside Dia	Reduce to	Thickness	Mass Kg
1000 ND	1130mm	750mm	150mm	234
1250 ND	1400mm	750mm	150mm	397
1500 ND	1670mm	750mm	175mm	810
Cover Slabs	Outside Dia	Reduce to	Thickness	Mass Kg
750 ND	860mm	560mm	150mm	114
1000 ND	1130mm	560mm	150mm	M/D 265
1000 ND	1130mm	560mm	150mm	H/D 271
1250 ND	1400mm	560mm	150mm	491
1500 ND	1670mm	560mm	175mm	914
6 Way Base	Outside Dia	Inside Dia	Height	Mass Kg
6 x 160 Knockouts	1130mm	1000mm	480mm	701
Spacer				
800 Dia with		560mm Hole	75mm High	Mass 045
Frame				
800 Tapered to 770mm Dia with 560mm Hole		130 mm High		Mass 065
Concrete Lids				
560mm Dia Medium Duty				Mass 085
560mm Dia Heavy Duty				Mass 082

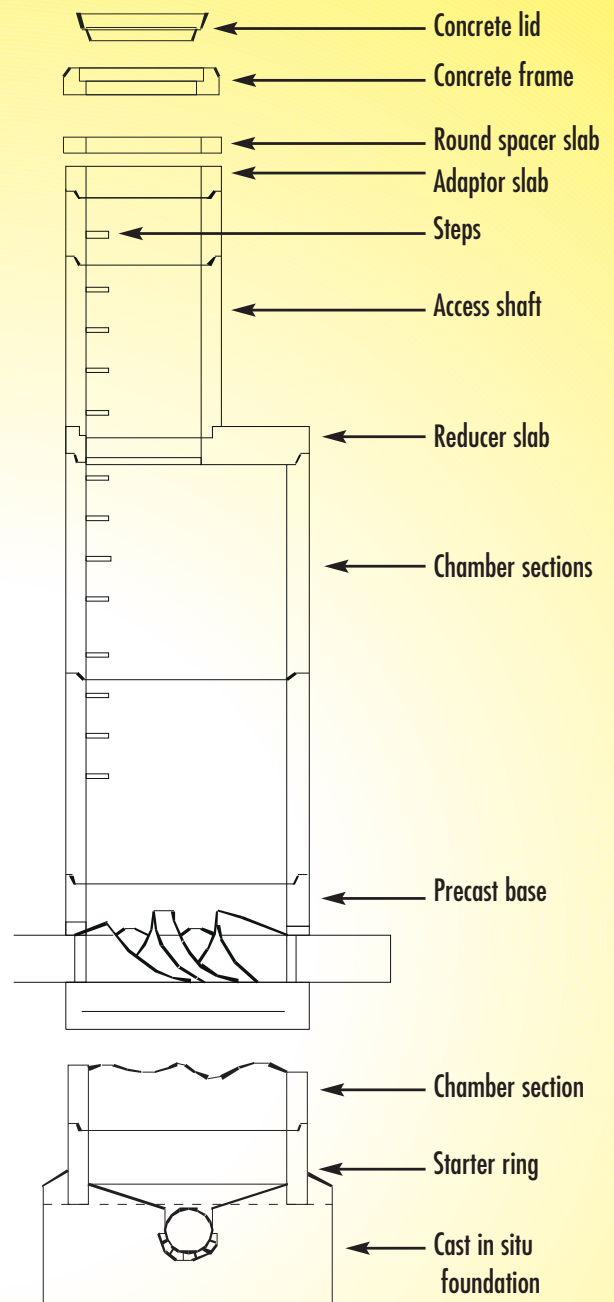

Please note: Mass per metre is an approximation only. Vula cannot guarantee the exact mass as listed on this table.