


SPIGOT AND SOCKET PIPES TO SABS SPECIFICATION SANS 677 TYPE SC AND SI FOR STORMWATER OR SEWER APPLICATIONS

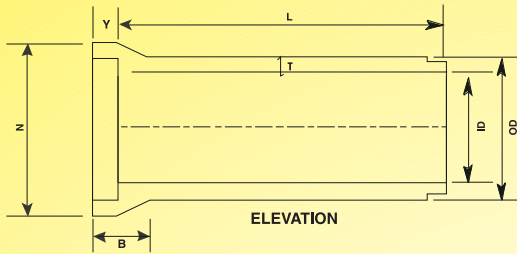

Please note: Mass per metre is an approximation only.

Vula cannot guarantee the exact mass as listed on this table.

L = All pipes are 2,5metres in length.



Nominal Diameter mm	Inside Diameter (ID mm)	Outside Diameter (OD mm)	Wall Thickness (T mm)	Socket Diameter (N mm)	Socket Length (B mm)	Socket Depth (Y mm)	Mass (Kg/Unit)	Proof Load (kN/m)
CLASS 50D								
300	292	368	38	464	222	114	277	15.0
375	369	445	38	540	235	127	356	18.8
450	445	533	44	641	257	127	500	22.5
525	514	616	51	730	263	131	659	26.3
600	599	699	50	826	295	138	755	30.0
675	685	787	51	920	318	139	883	33.8
750	762	870	54	1016	329	139	1046	37.5
825	818	946	64	1086	329	139	1295	41.3
900	913	1041	64	1194	363	139	1452	45.0
1050	1034	1194	80	1352	391	162	2025	52.5
1200	1187	1365	89	1543	424	168	2566	60.0
CLASS 75D								
300	292	368	38	464	222	114	277	22.5
375	369	445	38	540	235	127	356	28.1
450	445	533	44	641	257	127	500	33.8
525	514	616	51	730	263	131	659	26.3
600	585	699	57	826	295	138	837	39.4
675	673	787	57	920	318	139	878	45.0
750	738	870	66	1016	329	139	1041	50.06
825	812	946	67	1086	329	139	1343	61.9
900	869	1041	86	1194	363	139	1837	67.5
1050	1004	1194	95	1352	391	162	2326	78.8
1200	1157	1365	104	1543	424	168	2929	90.0
CLASS 100D								
300	292	368	38	464	222	114	277	30.0
375	369	445	38	540	235	127	356	37.5
450	445	533	44	641	257	127	533	45.0
525	514	616	51	730	263	131	659	52.5
600	585	699	57	826	295	138	837	60.0
675	665	787	61	920	318	139	1017	67.5
750	722	870	74	1016	329	139	1338	75.0
825	780	946	83	1086	329	139	1593	82.5
900	869	1041	86	1194	363	139	1837	90.0
1050	986	1194	104	1352	391	162	2502	105.0
1200	1127	1365	119	1543	424	168	3266	120.0

All Spigot and Socket Pipes use a Rolling Rubber Ring and no lubrication must be used.